





### 5. LCM drawing:

Count drawing & Spec:revision record during discussion with customer	Revision content description	Date
#1	FIRST ISSUE	2017-03-22

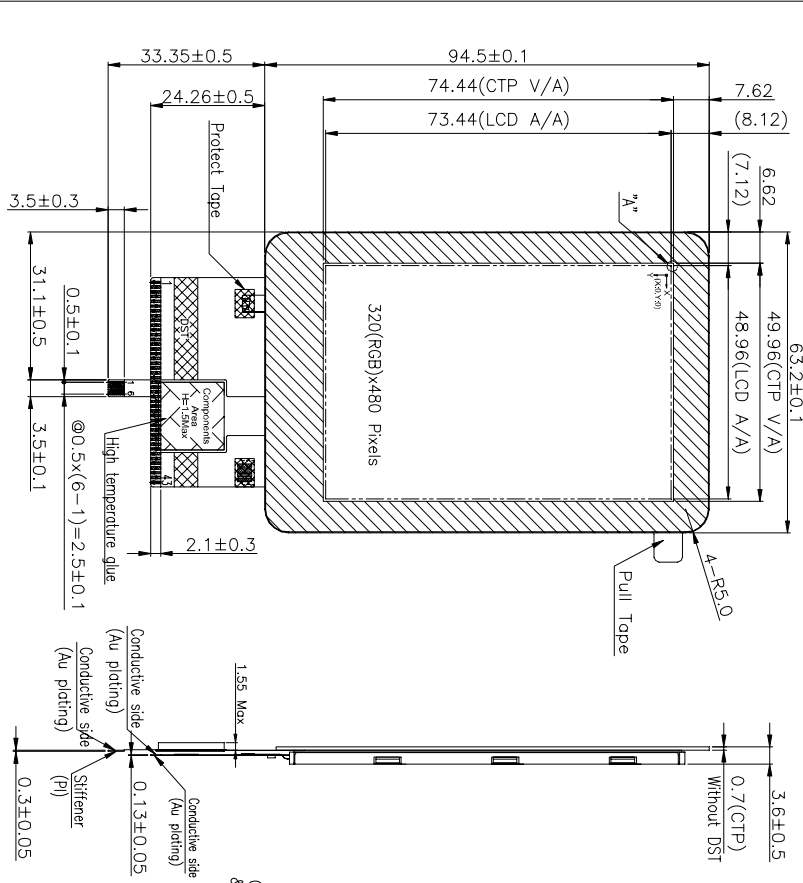

**Specification:**

1. Display mode: 3.5" TFT (262K) / Normal White / Transmissive
2. Viewing direction: Gray Inversion direction: 12 O'clock  
The Best Viewing Direction: 6 O'clock
3. Operating temperature: -20°C to +70°C  
Storage temperature: -30°C to +80°C
4. Drive ICs: S17796S or compatible
5. Backlight: 6 CHIP WHITE LED
6. Unspected tolerance: ±0.30mm.
7. ROHS compliant
8. Glass Type: OGS
9. Channel NO.: 12(TX) x 9(RX)
10. CTP Drive IC: ST1624



YB-TG320480S07A-C-AX — Yeebo P/N.  
XXXXXXXXXXXXXXXXXXXXX-X  
LOT NO.  
Production Year and week

Touch Panel PIN Assignment	FPC PIN OUT NO.	SYMBOL	NO.	SYMBOL
1	VDD	SYMBOL	1	GND
2	RESET	SYMBOL	2	LED-(K)
3	INT	SYMBOL	3	LED+(A)
4	SCL	SYMBOL	4	VDDA
5	SDA	SYMBOL	5	VDDI
6	GND	SYMBOL	6	TE
7		SYMBOL	7	CSX
8		SYMBOL	8	DCX(RS)
9		SYMBOL	9	WRX(SCL)
10		SYMBOL	10	RDX
11		SYMBOL	11	SDA
12		SYMBOL	12	DDUT(SDO)
13		SYMBOL	13	DB0
14		SYMBOL	14	DB1
15		SYMBOL	15	DB2
16		SYMBOL	16	DB3
17		SYMBOL	17	DB4
18		SYMBOL	18	DB5
19		SYMBOL	19	DB6
20		SYMBOL	20	DB7
21		SYMBOL	21	DB8
22		SYMBOL	22	DB9
23		SYMBOL	23	DB10
24		SYMBOL	24	DB11
25		SYMBOL	25	DB12
26		SYMBOL	26	DB13
27		SYMBOL	27	DB14
28		SYMBOL	28	DB15
29		SYMBOL	29	DB16
30		SYMBOL	30	DB17
31		SYMBOL	31	ENABLE
32		SYMBOL	32	DOTCLK
33		SYMBOL	33	HSYNC
34		SYMBOL	34	VSYNC
35		SYMBOL	35	RESET
36		SYMBOL	36	IM2
37		SYMBOL	37	IM1
38		SYMBOL	38	IM0
39		SYMBOL	39	GND
40		SYMBOL	40	NC(YU)
41		SYMBOL	41	NC(XL)
42		SYMBOL	42	NC(YD)
43		SYMBOL	43	NC(XR)

		MOD. Name	YB-TG320480S07A-C-A	DESIGNED	CHECKED	VERIFIED	APPROVED	FILE NAME
		DESIGNED	林麗芬	2017-03-22				Count Dwg.
UNIT	SIZE	SCALE						
mm	A4	N-T-S						
Sheet	Of							
1	1							