



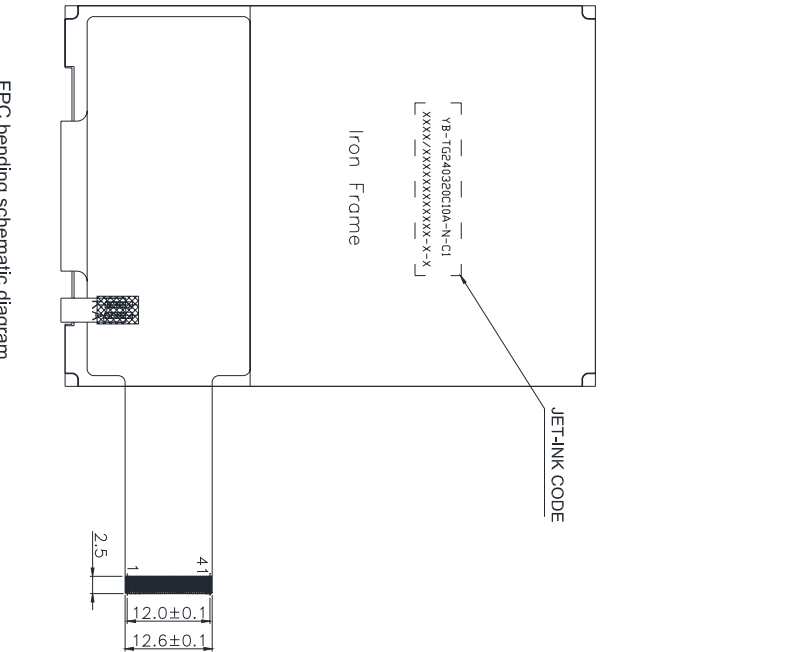

5. LCM drawing:

Count drawing & Spec.revision record during discussion with customer		Date
Rev:	Revision content description	2016-04-15
#1	FIRST ISSUE	2016-07-07
#2	FIRST ISSUE	2016-09-29
#3	Modify Specification	

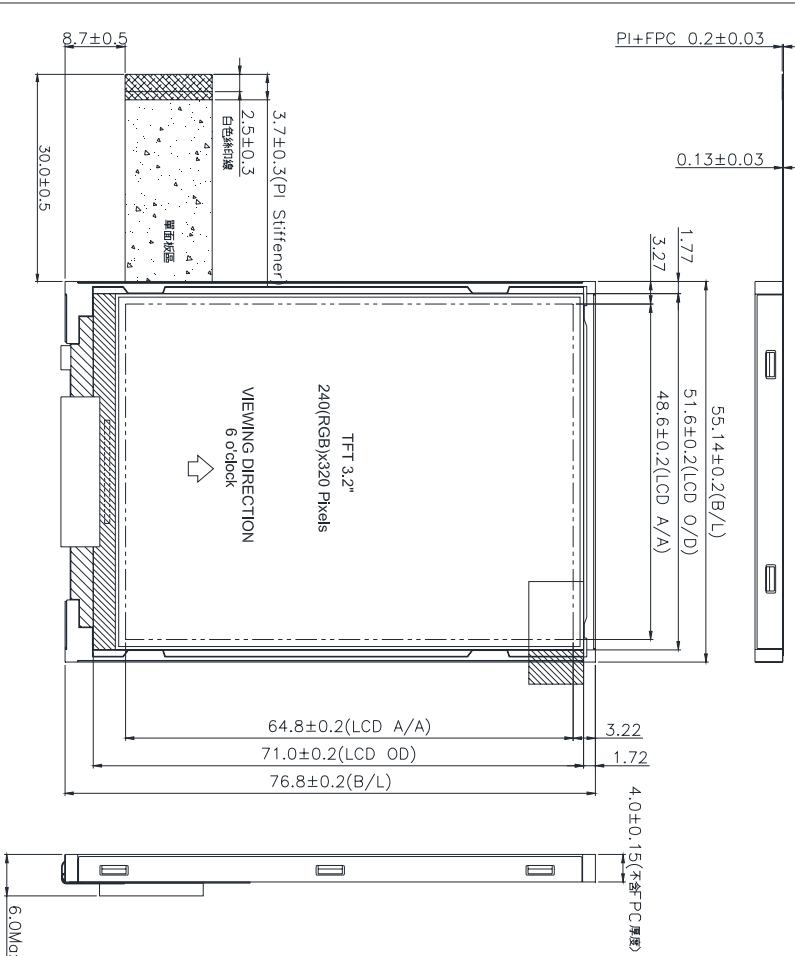

Specification:
 1. Display mode: 3.2" TFT (262K) Normal White/ Transmissive
 2. Interface: MCU/SPi
 3. Viewing direction: Gray Inversion direction: 12 O'clock
 The Best Viewing Direction: 6 O'clock
 4. Operating temperature: -10°C to +60°C
 Storage temperature: -20°C to +70°C
 5. Drive IC Is: ST7789V or Compatible
 6. Backlight: 5 CHIP WHITE LED
 7. Unspecified tolerance: ±0.30mm.
 8. ROHS compliant
 9. Interface connector: XF2B-4145-31A

JET-INK CODE NOTES:
 YB-TG240320C10A-N-C1 — Yeebo P/N.
 XXXXX-XXXXXXXXXXXXX-X-X
 LOT NO.
 Production Year and week

CIRCUIT DIAGRAM
 B/L Electrical Circuit
 I_f = 18mA
 (Reference V_f = 15.5V)
 A → K

NO.	SYMBOL	PIN ASSIGNMENT
1	VCI	
2	VSS	
3	VSS	
4	VSS	
5	IOVCC	
6	NC	
7	CS	
8	RS	
9	WR	
10	RD	
11	SDI	
12	SDO	
13	DB0	
14	DB1	
15	DB2	
16	DB3	
17	DB4	
18	DB5	
19	DB6	
20	DB7	
21	DB8	
22	DB9	
23	DB10	
24	DB11	
25	DB12	
26	DB13	
27	DB14	
28	DB15	
29	DB16	
30	DB17	
31	RESET	
32	IM3	
33	IM2	
34	IM1	
35	IM0/ID	
36	VLED	
37	VSS	
38	NC	
39	NC	
40	NC	
41	NC	

	UNIT	SIZE	SCALE	DESIGNED	CHECKED	VERIFIED	APPROVED	FILE NAME
	mm	A4	N-T-S	何宗益				Count Dwg.
MOD. Name	YB-TG240320C10A-N-C			CHECKED	VERIFIED	APPROVED	Sheet	1
DESIGNED	何宗益						Of	1