


Count drawing & Spec:revision record during discussion with customer	
Rec. #1	Revision content description
	FIRST ISSUE
Date	2016-07-22




CIRCUIT DIAGRAM


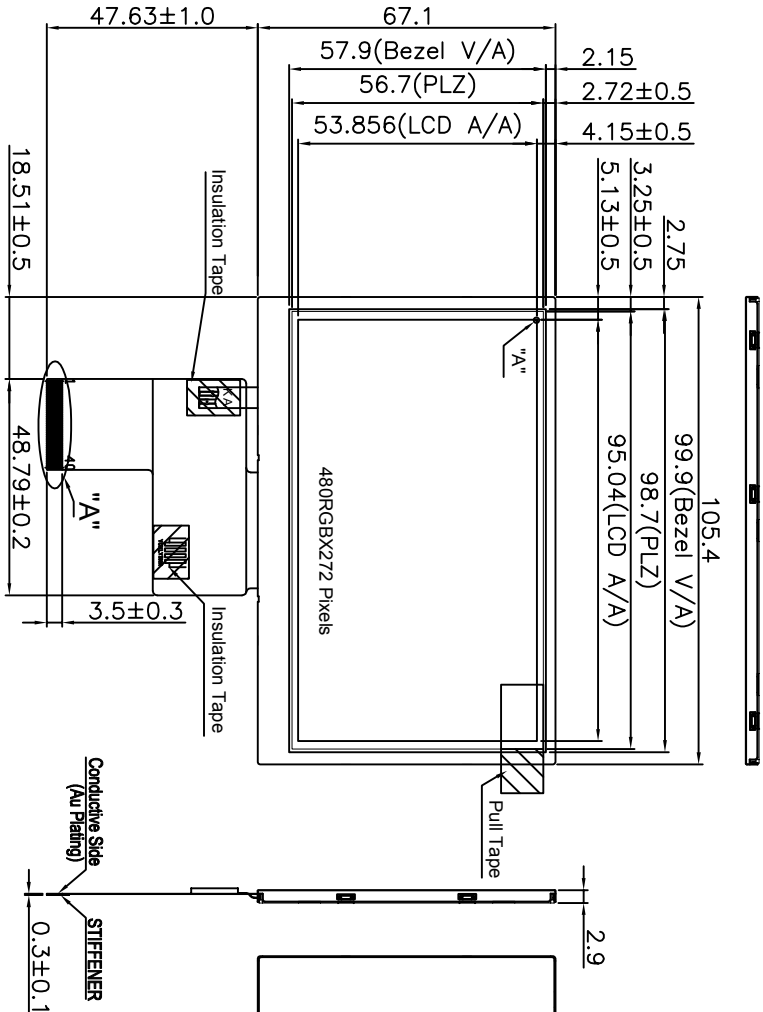


Specification:

1. Display mode: 4.3" TFT/ Transmissive / Normally White
2. Display Color: 16.7M
3. Viewing Direction: Gray Inversion direction: 6 o'clock
The Best Viewing Direction: 12 o'clock
4. Controller IC: ST7282 or Compatible
5. Operating temperature: -20°C to +70°C
Storage temperature: -30°C to +80°C
6. Backlight: 7 chips White LED
7. Unspecified tolerance: ±0.30mm.
8. ROHS compliant



JET-INK CODE NOTES:
 YB-TG480272S12A-N-DX — Yeebo P/N.
 XXXXX/XXXXXXXXXXXXXXXXX-X-X
 LOT NO.
 Production Year and week

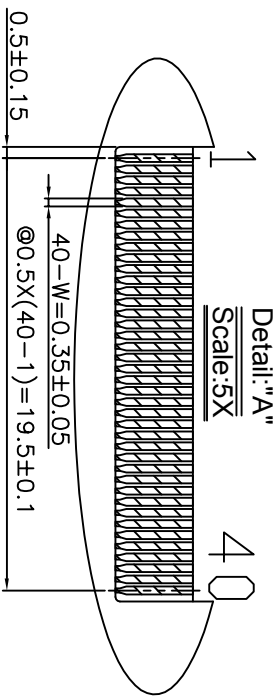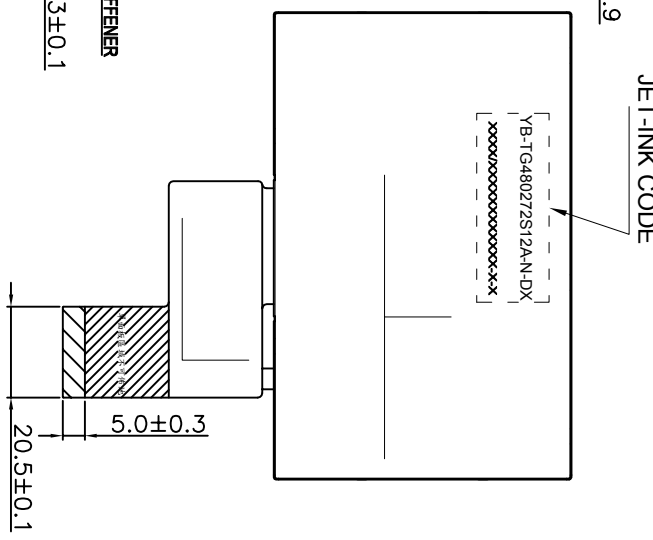

		UNIT	SIZE	SCALE	DESIGNED CHECKED VERIFIED APPROVED	FILE NAME
		mm	A4	N-T-S		
MOD. Name	YB-TG480272S12A-N-D		Sheet	1	Of	1
Count Dwg						

LCD MODUL	1	LEDK
FPC PIN OU	2	LEDA
	3	GND
	4	VDD
	5	R0
	6	R1
	7	R2
	8	R3
	9	R4
	10	R5
	11	R6
	12	R7
	13	G0
	14	G1
	15	G2
	16	G3
	17	G4
	18	G5
	19	G6
	20	G7
	21	B0
	22	B1
	23	B2
	24	B3
	25	B4
	26	B5
	27	B6
	28	B7
	29	GND
	30	DCLK
	31	DISP
	32	HSYNC
	33	VSYNC
	34	DE
	35	NC
	36	GND
	37	NC/XR
	38	NC/YD
	39	NC/XL
	40	NC/YU